



POS PRINTER PR-200

Application Benefits :

Support for Various I/O Port
(LAN/Serial/USB/CR Port)

ESC/P Command Compatible

Various OS Driver Support
(Win/Linux/Mac/Android)

Light and LED with 3 type melody
Wall mount Support





Black



White



PR-200

**Light and Sound Alarm
with Music Melody**

Paper near-end detection

Black mark detection

Two cash drawer outputs

Call reminder function


Anti-losing order function

**Auto cutter calibration
to avoid cutter stuck**

Printing status monitoring

Printer head over-heat protection

I/O Port

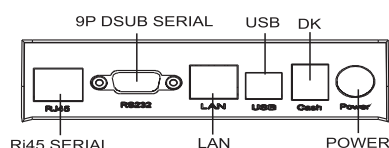

* Option



BST KOREA Co., Ltd.

Starwith Bdg, Unit 1011,
Heungan-daero 427 beon-gil 38
Dongan-gu, Anyang-si
Gyeonggi-do, Rep. of Korea

Web www.bstkr.com

Mail sales@bstkr.com

Tel +82-070-4196-3331

Model	PR-200
Command	Compatible with ESC/POS
Print mode	Thermal direct
Paper coming way	Top side
Resolution	203dpi
Print density	576 dots/line or 512 dots/line
Interface	Power (DIN-322) + DK(RJ11) + RJ45(Serial) + RS232(DSUB9) + USB + Ethernet * Factory Option : Bluetooth5.0+BLE or WiFi(802.11a/b/g/n)
Print width	Up to 72mm (2.8")
Print speed	Max 250 mm/s
Paper thickness	0.06~0.08mm
Roller specs	79.5±0.5mm Φ80mm(MAX)
Paper width	80mm ;
Character size	Character Type Font A(12x24), Font B(9x17), Chinese(Traditional/Simplified, 24x24), Korean(24x24), Japanese(24x24) Characters per line (CPL) Font A(12x24) : 48/42cpl, Font B(9x17) : 64/56cpl Character set 95 Alphanumeric, 16 International, 128 x 18 Graphic
Graph	Single color BMP and other image files can be downloaded to FLASH
1D barcode	UPC-A/UPC-E/JAN13(EAN13)/JAN8(EAN8)/CODE39/ITF/CODABAR/CODE93/CODE128
2D barcode	QR CODE、PDF417
Table	PC437(Std.Europe), (Katakana), PC850(Multilingual), PC860(Portugal), PC863(Canadian), PC865(Nordic), (West Europe), (Greek), (Hebrew), (East Europe), (Iran), (WPC1252), PC866(Cyrillic#2), PC852(Latin2), (PC858), (IranII), (Latvian), (Arabic), (PT1511251)
Software	Emulations : ESC/POS Command compatible Drivers : Windows Driver, Linux Driver, Mac Driver, OPOS Driver, JavaPOS Driver SDK : Android SDK, iOS SDK, Windows SDK
Mechanism sensor	Paper shortage: photoelectric sensor Closing detection: micro switch sensor Print head temperature detection: thermistor
Cutter	Half cut
Power adapter	Input : AC 100-240V 50/60Hz Output DC 24/2.5A; Certificate : KC(Korea)
Dimension	165 (L) * 128 (W) * 112 (H)
Environment	operation temperature 5°C ~ 45°C ; Working humidity 20%~ 90% (40%) storage temperature -20°C~ 60°C ; Storage humidity 20%~ 93% (40%)
Melody	3-type melody

