

STYLISH
POS TERMINAL

EDGE



Make Your Business Easier & Look More Attractive

- ▶ Powerful Performance
- ▶ Primary 15-inch Display
- ▶ Faster Installation & Service
- ▶ Sleek Modern Styling
- ▶ Clean Cable Management
- ▶ Compact Design Saves Space



EDGE POS

Specification

Processor	Intel® Celeron® J6412(Elkhart Lake) Intel Core i3/i5/i7
Memory	DDR4 Standard 4GB (up to 16GB) Socket 1 x SODIMM
HDD	2.5"SSD / M.2 128GB(up to 512GB)
LCD	15.1" TFT LCD(Ultra Wide view) 1024 * 768 LED Backlight
Touch	10 Point Capacitive Touch USB interface Full-window type
OS	Window 10 IoT / Linux
Rear IO	1 x DC -12V 4-pin Power Input Connector 1 x Ethernet Port (Gigabit RJ45) 4 x USB (3.0) Serial port Com1~3(D-SUB 9Pin RI/5V/12V by BIOS) Com4 (RJ45 with flow control)/ * Factory option (CR Port) Com5 (RJ45 only RX/TX with 5V, Reserved for MSR with USB) 1 x Audio Jack (Line-out)
Side IO	2 x USB (2.0)
Back IO	1 x HDMI Port with Power out(5V/12V), DC OUT 12V
Sound	1 x 1W (Mono), *Option 2 x 1W (Stereo)
Option	2nd Display : 9.7" TFT LCD (1024 x 768), HDMI Interface, VFD, 20 Columns x 2 Lines, USB Interface Identification Reader (3 Track-HID & i - Button) by USB
Dimension	355mm(W) 350mm(H) 180mm(D)
Certification	FCC, CE, KC
Color	White , Black
Power	60W Adaptor (In 100~240V/50~60Hz Out DC 12V/5A)



- ▶ 15" Ultra Wide LCD / LED back light
- ▶ True-Flat PCAP Touch
- ▶ High speed Intel Processor
- ▶ Fanless(celeron) and Silent heat solution
- ▶ Easy Swap HDD Lack type
- ▶ Structure for easy maintenance
- ▶ MSR/ibutton for Identification
- ▶ 2nd Display and Customer Display



Accessory (Option)



Customer Display




Identification Reader




Dual Monitor

Port

Rear

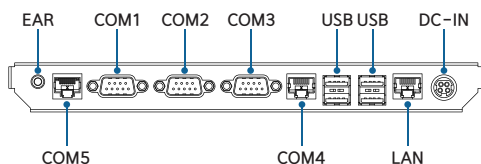

Back IO



BST KOREA CO., Ltd.

Web www.bstkr.com

Mail sales@bstkr.com

Tel +82-70-4196-3331

Starwith Bdg, Unit 1011,
Heungan-daero 427 beon-gil 38
Dongan-gu, Anyang-si
Gyeonggi-do, Rep. of Korea